



SIAM FITTINGS CO.,LTD.

www.siamfittings.th.com

MANUFACTURER & EXPORTER
MALLEABLE IRON FITTINGS



MALLEABLE IRON FITTINGS GALVANIZED & BLACK
Class 150 lbs. & 300 lbs.

ISO 9001:2008 QUALITY MANAGEMENT SYSTEM

LEAD FREE : CERTIFIED BY **IAPMO**



TIS. 249-2540

QUALITY SYSTEM ISO 9001:2008

STANDARD SPECIFICATIONS MALLEABLE IRON PIPE FITTINGS

	American 150lbs/300lbs.	British 150lbs.	Din 150lbs.
Material	ASTM A197/A197M	Equivalent to	Equivalent to
- Tensile Strength	Min. 40,000 psi.(28.4 Kg/mm. ²)	EN1562 EN-GJMB-300-6	EN1562 EN-GJMB-300-6
- Elongation	Min.5%		
Dimension			
- Fitting Dimension	ASME B16.3	ASME B16.3	ASME B16.3
- Union Dimension			
1.Union Brass Seat	ASME B16.39	ASME B16.39	ASME B16.39
2. Union Iron to Iron	N/A		EN 10242
- Plug&Bushing Dimension	ASME B16.14	ASME B16.14	ASME B16.14
Threads	ASME B 1.20.1	ISO 7-1(Rc,R)	ISO 7-1(Rp,R)
Zinc Coating	ASTM A153/A153M	Sec 5.3 BS 143&1256	Sec 5.2 En10242
Working Pressure	150psi@350°F/300psi@550°F	150 psi @ 350°F	150 psi @ 350°F

Pressure - Temperature Ratings

Temperature, °F	Working Pressure, psi (bar)			
	Class 150	Class 300		
		¾ -1"	1 ¼ -2"	2 ½ -3"
@-20 to 150	300 (20.7)	2,000 (137.9)	1,500 (103.4)	1,000 (68.9)
200	265 (18.3)	1,785 (123.1)	1,350 (93.1)	910 (62.7)
250	225 (15.5)	1,575 (108.6)	1,200 (82.7)	825 (56.9)
300	185 (12.8)	1,360 (93.7)	1,050 (72.4)	735 (50.7)
350	150 (10.3)	1,150 (79.3)	900 (62.1)	650 (44.8)
400	...	935 (64.5)	750 (51.7)	560 (38.6)
450	...	725 (50.0)	600 (41.4)	475 (32.7)
500	...	510 (35.2)	450 (31.0)	385 (26.5)
550	...	300 (20.7)	300 (20.7)	300 (20.7)

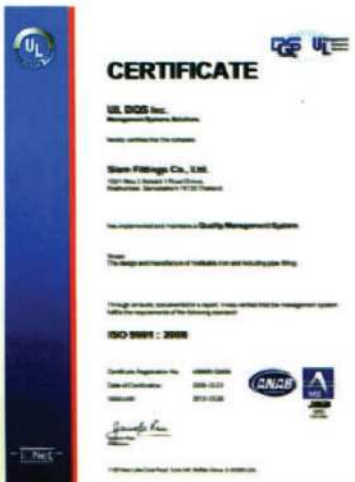
SA QUALITY POLICY

S = Satisfy Customers.
I = Improvement Continually.
A = At acceptable price and cost.
M = Management Leadership.

All product and services provided by Siam Fittings Co., Ltd. Shall conform to the standard requirements and by our customers. Each employee is responsible for his or her input to the procurement, production, support, delivery service, corporate with supplier of management provided.

We are committed to continually improving all products and services and to maintain Siam Fittings as Quality Leader in our field, by Involvement of people, Leadership, Process approach, System approach to management and making decision base on fact.

Doc.No.	S-MWH.-R.08
Issue/Rev.	C/2
Issue Date	1 Jul 2017



ISO 9001 :2008
No:438883 QM08



UL EX15117



UL EX15226



PSB Certificate No:02171



IAPMO File No:6300



249-2540

CERTIFICATE




FM Project ID: 3034495


QUALITY SYSTEM
ISO 9001:2008

MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.


ELBOWS 90°

90	L 90	Size (inch)	FM®	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/8	✓ ✓	17.5	50	600	12	0.0306	18
		1/4	✓ ✓	20.6	35	420	12	0.0515	22
		3/8	✓ ✓	24.1	90	360	4	0.0710	26
		1/2	✓ ✓	28.4	50	200	4	0.1195	24
		3/4	✓ ✓	33.3	35	105	3	0.1865	20
		1	✓ ✓	38.1	20	60	3	0.2838	17
		1 1/4	✓ ✓	44.5	20	40	2	0.4504	18
		1 1/2	✓ ✓	49.3	15	30	2	0.5736	17
		2	✓ ✓	57.2	8	16	2	0.8932	14
		2 1/2	✓ ✓	68.6	-	12	1	1.4816	18
		3	✓ ✓	78.2	-	8	1	2.2560	20
		3 1/2	✓ ✓	86.9	-	4	1	3.1930	13
		4	✓ ✓	96.3	-	2	1	4.2200	8
		5	✓ ✓	114.3	-	2	1	6.7980	14
		6	✓ ✓	132.0	-	1	1	8.8690	9


ELBOWS 45°

120	L 45	Size (inch)	FM®	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/8	✓ ✓	16.0	50	600	12	0.0245	15
		1/4	✓ ✓	18.5	30	360	12	0.0464	17
		3/8	✓ ✓	20.3	75	300	4	0.0676	20
		1/2	✓ ✓	22.3	50	200	4	0.1024	20
		3/4	✓ ✓	24.9	40	120	3	0.1628	20
		1	✓ ✓	28.4	20	60	3	0.2503	15
		1 1/4	✓ ✓	32.8	20	40	2	0.3467	14
		1 1/2	✓ ✓	36.3	10	30	3	0.5098	15
		2	✓ ✓	42.7	12	24	2	0.8008	19
		2 1/2	✓ ✓	49.5	-	12	1	1.2640	15
		3	✓ ✓	55.1	-	10	1	1.9436	19
		4	✓ ✓	66.3	-	4	1	3.4280	14
		5	✓ ✓	77.5	-	2	1	4.8500	10
		6	✓ ✓	87.9	-	1	1	6.7660	7


STREET ELBOWS 90°

92	SL 90	Size (inch)	FM®	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/8	✓ ✓	17.5 25.4	60	720	12	0.0256	18
		1/4	✓ ✓	20.6 30.2	35	420	12	0.0440	18
		3/8	✓ ✓	24.1 36.6	60	240	4	0.0720	17
		1/2	✓ ✓	28.4 41.4	60	180	3	0.1070	19
		3/4	✓ ✓	33.3 48.0	35	105	3	0.1740	18
		1	✓ ✓	38.1 54.3	45	90	2	0.2693	24
		1 1/4	✓ ✓	44.5 62.2	25	50	2	0.4216	21
		1 1/2	✓ ✓	49.3 68.3	9	27	3	0.5734	15
		2	✓ ✓	57.2 82.8	8	16	2	1.0092	16
		2 1/2	✓ ✓	68.6 98.0	5	10	2	1.6400	16
		3	✓ ✓	78.2 114.5	-	8	1	2.4160	19
		4	✓ ✓	96.3 144.5	-	4	1	4.2400	17
		5	✓ ✓	114.3 174.2	-	1	1	5.5000	6
		6	✓ ✓	130.3 204.0	-	1	1	12.3666	12


STREET ELBOWS 45°

121	SL45	Size (inch)	FM	UL	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	✓	✓	16.0 21.0	70	840	12	0.0243	20
		1/4	✓	✓	18.5 23.9	40	480	12	0.0395	19
		3/8	✓	✓	20.3 26.2	100	400	4	0.0582	23
		1/2	✓	✓	22.3 33.0	75	225	3	0.0996	22
		3/4	✓	✓	24.9 37.5	40	120	3	0.1436	17
		1	✓	✓	28.4 43.0	25	75	3	0.2540	19
		1 1/4	✓	✓	32.8 47.4	10	40	4	0.3546	14
		1 1/2	✓	✓	36.3 51.7	10	30	3	0.5104	15
		2	✓	✓	42.7 60.4	12	24	2	0.7944	19
		2 1/2	✓	✓	49.5 69.0	6	12	2	1.3512	16
		3	✓	✓	55.1 80.2	3	6	2	2.1280	13
		4	✓	✓	66.3 99.0	-	4	1	3.3770	14

TEES

130	T	Size (inch)	FM	UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	✓	✓	17.5	120	480	4	0.0452	22
		1/4	✓	✓	20.6	75	300	4	0.0702	21
		3/8	✓	✓	24.1	45	180	4	0.1087	20
		1/2	✓	✓	28.4	40	120	3	0.1686	20
		3/4	✓	✓	33.3	35	70	2	0.2542	18
		1	✓	✓	38.1	20	40	2	0.3998	16
		1 1/4	✓	✓	44.5	14	28	2	0.6020	17
		1 1/2	✓	✓	49.3	12	24	2	0.7254	17
		2	✓	✓	57.2	8	16	2	1.2100	19
		2 1/2	✓	✓	68.6	4	8	2	2.2133	18
		3	✓	✓	78.2	-	6	1	2.9500	18
		4	✓	✓	96.3	1	2	2	5.2920	11
		5	✓	✓	114.3	-	1	1	9.1200	9
		6	✓	✓	132.0	-	1	1	11.8133	12

SERVICE TEES

134	ST	Size (inch)	FM	UL	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/2	✓	✓	28.4 41.4	40	120	3	0.1600	17
		3/4	✓	✓	33.3 48.0	25	75	3	0.2480	19
		1	✓	✓	38.1 54.3	20	40	2	0.4040	16
		1 1/4	✓	✓	44.5 62.2	15	30	2	0.6460	19
		1 1/2	✓	✓	49.3 68.3	12	24	2	0.8088	19
		2	✓	✓	57.2 82.8	8	16	2	1.2900	21
										

SIDE OUTLET TEES

223	SOT	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		3/8	24.1	40	160	4	0.1140	18
		1/2	28.4	25	100	4	0.1766	18
		3/4	33.3	15	60	4	0.2750	17
		1	38.1	20	40	2	0.4248	17
		1 1/4	44.5	12	24	2	0.6300	15
		1 1/2	49.3	8	16	2	0.7500	12
		2	57.2	4	8	2	1.6580	13


SIDE OUTLET ELBOWS

221	SOL	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	17.5	45	540	12	0.0390	21
		1/4	20.6	75	300	4	0.0680	20
		3/8	24.1	50	200	4	0.1050	21
		1/2	28.4	45	135	3	0.1530	18
		3/4	33.3	20	80	4	0.2130	17
		1	38.1	20	40	2	0.3392	14
		1 1/4	44.5	15	30	2	0.5914	18
		1 1/2	49.3	12	24	2	0.6680	17
		2	57.2	5	10	2	1.1260	11


CROSSES

180	CR	Size (inch)	◀FM▶ (UL)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	✓ ✓	17.5	30	360	12	0.0520	19
		1/4	✓ ✓	20.6	60	240	4	0.0881	21
		3/8	✓ ✓	24.1	50	150	3	0.1310	20
		1/2	✓ ✓	28.4	30	90	3	0.1980	18
		3/4	✓ ✓	33.3	20	60	3	0.3006	18
		1	✓ ✓	38.1	15	30	2	0.4642	14
		1 1/4	✓ ✓	44.5	10	20	2	0.7200	14
		1 1/2	✓ ✓	49.3	8	16	2	0.9384	15
		2	✓ ✓	57.2	5	10	2	1.4200	14
		2 1/2	✓ ✓	68.6	3	6	2	2.4520	15
		3	✓ ✓	78.2	2	4	2	3.7440	15
		4	✓ ✓	96.3	1	2	2	6.2900	13
		5	✓ ✓	114.3	-	1	1	8.0000	8
		6	✓ ✓	132.0	-	1	1	13.0000	13


REDUCING CROSSES

180R	RCR	Size (inch)	FM	UL	Dimensions A B		Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1 1/2 X 1 1/4	✓	✓	46.2	47.8	9	18	2	0.9060	16
		2 X 1 1/4	✓	✓	48.3	53.3	5	10	2	1.1380	11
		2 1/2 X 1 1/4	✓	✓	52.0	62.0	4	8	2	1.4510	12
		2 1/2 X 1 1/2	✓	✓	56.0	63.0	4	8	2	1.5430	12

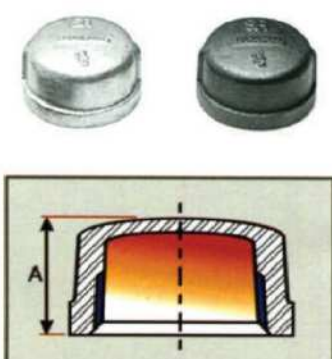
EXTENSIONS

529A	X	Size (inch)	Dimensions A		Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		3/8	32.0		40	480	12	0.0480	23
		1/2	40.0		75	300	4	0.0712	5
		3/4	48.0		40	160	4	0.1400	20
		1	55.0		30	90	3	0.1892	17
		1 1/4	60.0		30	60	2	0.2872	17
		1 1/2	65.0		20	40	2	0.3902	16
		2	70.0		15	30	2	0.5990	18

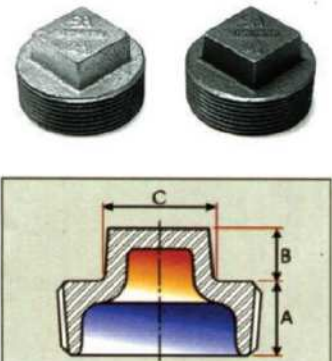
COUPLINGS

270	S	Size (inch)	FM	UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/8	✓	✓	24.4	70	840	12	0.0250	21
		1/4	✓	✓	26.9	40	480	12	0.0399	19
		3/8	✓	✓	29.5	40	480	12	0.0574	28
		1/2	✓	✓	34.0	60	240	4	0.0920	22
		3/4	✓	✓	38.6	50	150	3	0.1330	20
		1	✓	✓	42.4	25	100	4	0.2077	21
		1 1/4	✓	✓	49.0	16	64	4	0.3164	20
		1 1/2	✓	✓	54.6	18	36	2	0.4196	15
		2	✓	✓	64.3	12	24	2	0.6556	16
		2 1/2	✓	✓	73.2	8	16	2	1.0320	17
		3	✓	✓	80.8	-	12	1	1.6377	20
		4	✓	✓	93.7	3	6	2	2.6060	16
		5	✓	✓	95.0	1	2	2	4.1800	8
		6	✓	✓	102.5	-	2	1	4.1180	8

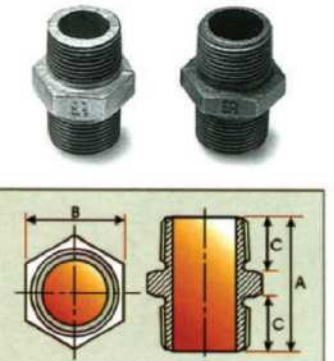
CAPS

301	CA	Size (inch)	◀FM▶	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO.of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)	
		1/8	✓	✓	13.5	120	1440	12	0.0161	23
		1/4	✓	✓	16.0	80	960	12	0.0245	24
		3/8	✓	✓	18.8	60	720	12	0.0347	25
		1/2	✓	✓	22.1	75	300	4	0.0575	17
		3/4	✓	✓	24.6	40	160	4	0.0966	15
		1	✓	✓	29.5	25	100	4	0.1424	14
		1 1/4	✓	✓	32.5	20	80	4	0.2008	16
		1 1/2	✓	✓	33.8	18	54	3	0.2528	14
		2	✓	✓	36.8	12	36	3	0.4220	15
		2 1/2	✓	✓	43.2	20	40	2	0.7270	29
		3	✓	✓	45.7	-	24	1	1.0684	26
		3 1/2	✓	✓	48.3	6	12	2	1.4680	18
		4	✓	✓	52.8	6	12	2	1.7672	21
		5	✓	✓	58.9	5	10	2	2.8600	29
		6	✓	✓	64.8	2	4	2	4.7733	19

PLUGS

290	P	Size (inch)	◀FM▶	Ⓡ	Dimensions A B C			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
	1/8	✓	✓	9.8	6.1	7.1	300	3,600	12	0.0058	21	
	1/4	✓	✓	11.6	7.1	9.5	150	1,800	12	0.0149	27	
	3/8	✓	✓	12.6	8.0	11.0	100	1,200	12	0.0220	26	
	1/2	✓	✓	14.7	9.7	14.3	50	600	12	0.0414	22	
	3/4	✓	✓	16.5	11.2	15.9	30	360	12	0.0660	21	
	1	✓	✓	19.1	12.7	20.9	20	240	12	0.1100	22	
	1 1/4	✓	✓	20.9	14.2	23.8	40	120	3	0.1840	21	
	1 1/2	✓	✓	21.7	15.8	28.6	30	90	3	0.2500	20	
	2	✓	✓	23.2	17.3	33.3	20	60	3	0.3840	21	
	2 1/2	✓	✓	32.0	18.8	38.1	16	32	2	0.5091	16	
	3	✓	✓	29.4	20.3	42.9	16	32	2	0.7532	24	
	4			31.0	25.4	58.0	6	12	2	1.4873	18	
	5			33.3	25.4	67.0	5	10	2	2.0320	20	
	6			35.6	31.8	77.0	5	10	2	2.7320	27	


NIPPLES

280	NI	Size (inch)	Dimensions A B C	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	32 14 11.0	240	960	4	0.0220	21
		1/4	34 17 12.0	200	800	4	0.0260	21
		3/8	36 21 13.0	150	600	4	0.0410	25
		1/2	45 27 18.5	80	320	4	0.0692	22
		3/4	48 32 19.5	60	180	3	0.1056	20
		1	53 38 21.5	40	120	3	0.1560	19
		1 1/4	56 48 23.0	35	70	2	0.2226	19
		1 1/2	60 55 24.0	25	50	2	0.3360	17
		2	70 70 28.0	18	36	2	0.6112	22
		2 1/2	76 85 31.0	10	20	2	0.8636	17
		3	84 100 34.0	6	12	2	1.2865	15
		4	95 130 38.5	3	6	2	1.8512	11
		5	104 145 44.0	2	4	2	2.6390	11
		6	116 170 46.0	-	3	1	3.9510	12

REDUCING NIPPLES

245

RNI




Size (inch)	Dimensions				Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
	A	B	C	D					
3/8 X 1/4	38.0	19.0	15.0	14.0	105	210	2	0.0450	9
1/2 X 1/4	44.0	22.0	19.0	16.0	90	180	2	0.0650	12
1/2 X 3/8	44.0	22.0	19.0	16.0	170	340	2	0.0710	24
3/4 X 1/2	47.0	30.0	20.5	17.5	50	200	4	0.0860	17
1 X 1/2	53.0	36.0	24.5	18.5	50	150	3	0.1530	23
1 X 3/4	53.0	36.0	22.5	20.5	45	135	3	0.1320	18
1 1/4 X 1/2	57.0	46.0	26.0	21.0	40	80	2	0.2170	17
1 1/4 X 3/4	57.0	46.0	25.0	22.0	40	80	2	0.2000	16
1 1/4 X 1	57.0	46.0	25.0	22.0	40	80	2	0.2220	18
1 1/2 X 1/2	59.0	50.0	26.0	21.0	30	60	2	0.2960	18
1 1/2 X 3/4	59.0	50.0	25.0	22.0	30	60	2	0.3230	19
1 1/2 X 1	59.0	50.0	25.0	22.0	25	50	2	0.3028	15
1 1/2 X 1 1/4	59.0	50.0	25.0	22.0	25	50	2	0.3138	16
2 X 1/2	68.0	65.0	33.0	21.0	25	50	2	0.4100	21
2 X 3/4	68.0	65.0	32.0	22.0	25	50	2	0.4100	21
2 X 1	68.0	65.0	30.0	24.0	25	50	2	0.4250	21
2 X 1 1/4	68.0	65.0	30.0	24.0	20	40	2	0.4216	17
2 X 1 1/2	68.0	65.0	30.0	24.0	18	36	2	0.4490	16
2 1/2 X 1	75.0	80.0	35.0	24.0	10	20	2	0.8000	16
2 1/2 X 1 1/4	75.0	80.0	33.0	26.0	10	20	2	0.5600	11
2 1/2 X 1 1/2	75.0	80.0	33.0	26.0	10	20	2	0.9000	18
2 1/2 X 2	75.0	80.0	31.0	28.0	16	32	2	0.7200	23
3 X 1 1/2	83.0	95.0	39.0	28.0	6	12	2	1.2000	14
3 X 2	83.0	95.0	37.0	30.0	6	12	2	1.0682	13
3 X 2 1/2	83.0	95.0	35.0	32.0	6	12	2	1.0200	12
4 X 2	95.0	130.0	47.0	31.0	4	8	2	2.1400	17
4 X 2 1/2	95.0	130.0	47.0	31.0	4	8	2	2.0200	16
4 X 3	95.0	130.0	42.0	36.0	4	8	2	1.8848	15

FLOOR FLANGES

324

FF




Size (inch)	Dimensions				Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
	A	B	C	D					
3/8	88.9	12.7	7.2	6.4	25	75	3	0.3020	23
1/2	88.9	14.3	7.2	6.4	25	50	2	0.3006	15
3/4	88.9	15.9	7.9	6.4	15	45	3	0.3258	15
1	101.6	17.5	8.7	6.4	15	30	2	0.4444	13
1 1/4	101.6	19.1	8.7	6.4	10	30	3	0.4630	14
1 1/2	114.3	22.2	9.5	8.0	8	24	3	0.6172	15
2	139.7	25.4	10.4	8.0	8	16	2	0.9938	16

ROUND FLANGES 'D'

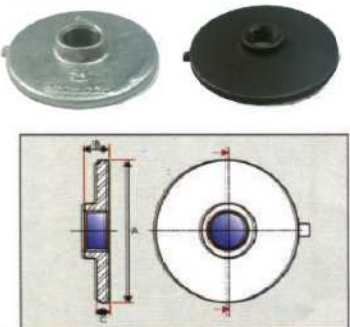
322

FD

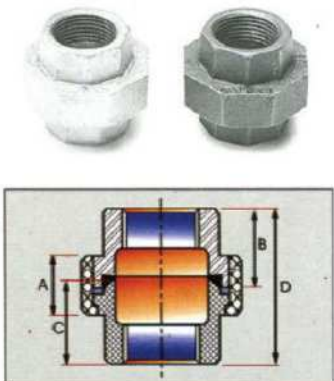


Size (inch)	Dimensions				Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
	A	B	C	D					
1/2	95.0	13	5	14.0	25	50	2	0.2860	14
3/4	100.0	16	5	14.0	15	45	3	0.3400	15
1	115.0	18.0	6.0	14.0	15	30	2	0.4830	14
1 1/4	120.0	18.5	7.5	14.0	10	30	3	0.4900	15
1 1/2	135.0	20.5	7.5	14.0	8	24	3	0.6480	16
2	150.0	21.0	8.0	18.0	8	16	2	1.0150	16
2 1/2	165.0	24	8	18.0	4	12	3	1.2400	15
3	185.0	25.4	9.5	18.0	4	8	2	1.7100	14
4	215.0	38.5	10.5	18.0	3	6	2	2.5890	16
5	255.0	32.5	13.5	18.0	-	4	1	4.3620	17
6	280.0	47	21	18.0	-	4	1	5.5786	22

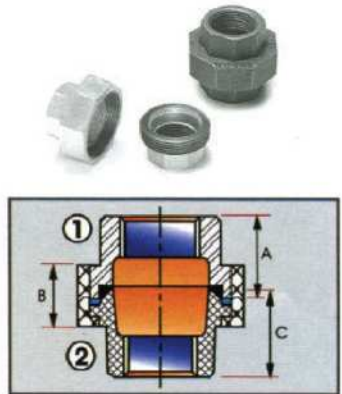
ROUND FLANGES.

321	F	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
			A	B	C					
	F	1/2	95.0	D 16	6.5	25	50	2	0.2860	14
		3/4	102.0	D 17	7.0	15	45	3	0.3400	15
		1	114.0	19	8.0	15	30	2	0.4830	14
		1 1/4	120.0	21	8.0	10	30	3	0.4900	15
		1 1/2	133.0	D 24	9.0	8	24	3	0.6480	16
		2	152.0	25	10.0	8	16	2	1.0150	16
		2 1/2	165.0	24.5	8.0	4	12	3	1.2400	15
		3	184.0	27.0	10.0	4	8	2	1.7100	14
		4	217.0	30.0	10.0	3	6	2	2.5890	16
		5	254.6	45.0	15.0	-	4	1	4.0000	16
		6	284.0	50.0	15.0	-	4	1	5.5786	22


UNIONS CONICAL BRASS SEAT

342	CU	Size (inch)	◀FM▶	Dimensions				Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/ Pcs.(Kgs.)	N.W./Ctn. (Kgs.)
				A	B	C	D					
	1/8	✓	✓	14.0	16.5	17.50	32.0	60	240	4	0.0579	14
	1/4	✓	✓	15.5	18.5	20.25	36.6	20	240	12	0.0950	23
	3/8	✓	✓	16.0	21.0	22.75	40.9	40	160	4	0.1567	25
	1/2	✓	✓	17.0	23.0	25.25	43.7	50	100	2	0.1951	20
	3/4	✓	✓	18.5	25.5	27.75	49.3	35	70	2	0.2730	19
	1	✓	✓	20.0	27.0	30.00	52.3	20	40	2	0.4130	17
	1 1/4	✓	✓	24.0	30.0	35.00	57.4	15	30	2	0.6168	19
	1 1/2	✓	✓	25.5	33.0	38.00	61.2	10	20	2	0.7960	16
	2	✓	✓	27.0	37.0	41.00	69.8	6	12	2	1.2096	15
	2 1/2	✓	✓	29.5	42.0	45.50	81.8	4	8	2	2.0320	16
	3	✓	✓	32.5	47.0	50.00	88.9	4	8	2	2.7010	22
	4	✓	✓	39.0	58.0	60.50	97.8	2	4	2	4.5850	18


REDUCING UNIONS

RCU	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		A	B	C					
	3/4 X 1/2	22.5	18.5	27.75	30	90	3	0.3050	27


UNIONS FLAT SEAT WITHOUT GASKET

330	U	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
			A	B	C					
 		1/4	18.3	15.5	19.0	20	240	12	0.0930	22
		3/8	19.0	16.0	20.5	40	160	4	0.1598	26
		1/2	21.0	17.0	24.5	50	100	2	0.1960	20
		3/4	24.5	18.5	26.5	35	70	2	0.2850	20
		1	27.0	20.0	29.0	20	40	2	0.4130	17
		1 1/4	30.0	24.0	34.0	15	30	2	0.6144	18
		1 1/2	33.0	25.5	37.5	10	20	2	0.7940	16
		2	37.0	37.0	40.0	6	12	2	1.1900	14
		2 1/2	42.0	29.5	49.5	4	8	2	2.0000	16
		3	47.0	32.5	49.5	4	8	2	2.5590	20
		4	58.0	39.0	60.5	2	4	2	4.6874	19
		6	73.0	49.0	73.0	-	2	1	11.1200	22

UNIONS CONICAL IRON to IRON SEAT

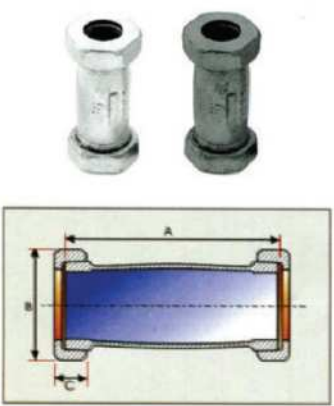
340	U340	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
			A	B	C					
 		1/2	26.0	19.0	30.0	50	100	2	0.1990	20
		3/4	28.0	20.0	30.5	35	70	2	0.2860	20
		1	31.0	22.0	34.0	20	40	2	0.3480	14
		1 1/4	33.0	24.0	40.0	15	30	2	0.6040	18
		1 1/2	36.0	25.0	42.5	10	20	2	0.7180	14
		2	42.0	27.0	46.0	6	12	2	1.0740	13
		2 1/2	44.0	33.5	51.5	4	8	2	2.0000	16

UNIONS CONICAL IRON to IRON SEAT, M & F

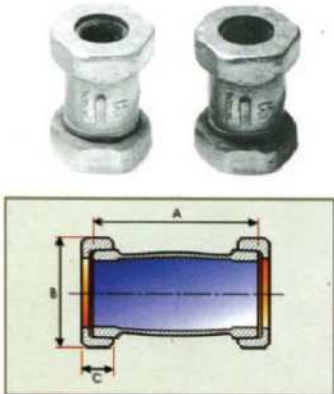
341	U341	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
			A	B	C					
 		1/2	26.0	19.0	30.0	50	100	2	0.2520	25
		3/4	28.0	20.0	30.5	35	70	2	0.3260	23
		1	31.0	22.0	34.0	20	40	2	0.4080	16
		1 1/4	33.0	24.0	40.0	15	30	2	0.7150	21
		1 1/2	36.0	27.0	42.5	10	20	2	0.8720	17
		2	42.0	27.0	46.0	6	12	2	1.0130	12

MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.

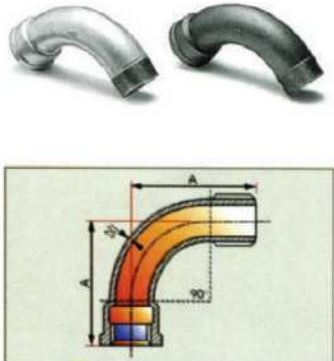
LONG COMPRESSION COUPLINGS

LCC	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		A	B	C					
	1/2	78.0	48.0	15.0	20	40	2	0.4000	16
	3/4	86.5	54.0	16.0	15	30	2	0.5200	16
	1	97.0	57.0	17.0	10	20	2	0.6720	13
	1 1/4	107.0	67.0	18.0	10	20	2	0.9300	19
	1 1/2	115.0	76.0	18.0	6	12	2	1.1500	14
	2	127.0	89.0	19.0	5	10	2	1.6600	17


SHORT COMPRESSION COUPLINGS

SLCC	Size (inch)	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		A	B	C					
	1/2	59.0	48.0	15.0	25	75	3	0.3020	23
	3/4	64.5	54.0	16.0	20	60	3	0.4060	24
	1	69.0	57.0	17.0	18	36	2	0.5130	9
	1 1/4	74.0	67.0	18.0	10	20	2	0.6970	14
	1 1/2	79.0	76.0	18.0	12	24	2	0.8650	21
	2	84.0	89.0	19.0	6	12	2	1.2000	14
	2 1/2	94.0	109.0	26.0	4	8	2	2.0800	17
	3	104.0	135.7	26.0	2	4	2	2.7900	11


BENDS M & F 90°

1	BMF90	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/4	38	100	400	4	0.0570	23
		3/8	44	60	240	4	0.0810	19
		1/2	52	40	160	4	0.1190	19
		3/4	65	40	80	2	0.2160	17
		1	82	20	40	2	0.3678	15
		1 1/4	100	14	28	2	0.6020	17
		1 1/2	115	9	18	2	0.7960	14
		2	140	5	10	2	1.3528	14
		2 1/2	175	-	6	1	2.6860	16
		3	205	-	3	1	3.4190	10
		4	260	-	1	1	7.4200	7
		5	318	-	1	1	17.2000	17
		6	375	-	1	1	23.0000	23


BENDS M & F 45°

40	BMF45	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/2	38	60	180	4	0.1180	21
		3/4	45	30	90	3	0.1950	18
		1	55	25	50	2	0.3150	16
		1 1/4	63	15	30	2	0.4850	15
		1 1/2	70	12	24	2	0.6400	15
		2	85	6	12	2	1.1000	13
		2 1/2	100	3	6	2	1.7000	10
		3	115	2	4	2	2.6500	11
		4	145	-	2	1	6.4000	13
		5	170	-	1	1	8.6000	9
		6	195	-	1	1	13.3300	13

BENDS FEMALE 90°


2	BF90	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/2	52	40	160	4	0.1510	24
		3/4	65	40	80	2	0.2700	22
		1	82	24	48	2	0.4256	20
		1 1/4	100	12	24	2	0.7740	19
		1 1/2	115	9	18	2	0.8920	16
		2	140	-	10	1	1.5036	15
		2 1/2	175	-	4	1	2.9200	12
		3	205	-	3	1	4.1662	12
		4	260	-	1	1	9.5000	10
		6	375	-	1	1	22.0000	22

BENDS FEMALE 45°


41	BF45	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/2	38.0	60	180	3	0.1520	27
		3/4	45.0	30	90	3	0.2100	19
		1	55.0	25	50	2	0.3650	18
		1 1/4	63.0	15	30	2	0.5800	17
		1 1/2	70.0	12	24	2	0.7200	17
		2	81.5	6	12	2	1.1660	14
		2 1/2	100.0	3	6	2	2.3250	14
		3	115.0	2	4	2	2.9500	12
		4	145.0	-	2	1	6.4000	13

MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.

CROSS OVER

85	NOS	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/2	92	20	80	4	0.2090	17
		3/4	112	25	50	2	0.3450	17

REDUCING ELBOWS

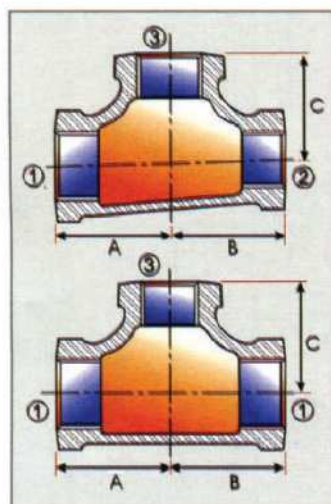
90R	RL	Size (inch)	FM	UL	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/4 X 1/8	✓	✓	18.8 19.3	40	480	12	0.0400	21
		3/8 X 1/8	✓	✓	20.5 21.6	105	420	4	0.0580	24
		3/8 X 1/4	✓	✓	22.4 22.9	90	360	4	0.0628	23
		1/2 X 1/8	✓	✓	26.4 26.2	60	240	4	0.0700	17
		1/2 X 1/4	✓	✓	24.6 24.9	60	240	4	0.0800	19
		1/2 X 3/8	✓	✓	26.4 26.2	60	240	4	0.0944	23
		3/4 X 1/8	✓	✓	26.2 25.7	40	160	4	0.1050	17
		3/4 X 1/4	✓	✓	26.7 27.4	40	160	4	0.1110	18
		3/4 X 3/8	✓	✓	28.5 28.7	40	160	4	0.1330	21
		3/4 X 1/2	✓	✓	30.5 31.0	40	160	4	0.1493	24
		1 X 1/4	✓	✓	30.0 32.0	25	100	4	0.1580	16
		1 X 3/8	✓	✓	30.0 32.3	25	100	4	0.1770	18
		1 X 1/2	✓	✓	32.0 35.5	25	100	4	0.1976	20
		1 X 3/4	✓	✓	34.8 36.8	50	100	2	0.2460	25
		1 1/4 X 1/2	✓	✓	34.0 38.9	20	80	4	0.2800	22
		1 1/4 X 3/4	✓	✓	36.8 41.2	15	60	4	0.3060	18
		1 1/4 X 1	✓	✓	40.1 42.4	10	40	4	0.3710	15
		1 1/2 X 1/2	✓	✓	35.0 42.0	15	60	4	0.3436	21
		1 1/2 X 3/4	✓	✓	38.6 44.5	10	40	4	0.4000	16
		1 1/2 X 1	✓	✓	41.9 45.7	10	40	4	0.4160	17
		1 1/2 X 1 1/4	✓	✓	46.2 47.8	15	30	2	0.5380	16
		2 X 1/2	✓	✓	37.6 47.5	10	40	4	0.4520	18
		2 X 3/4	✓	✓	40.6 50.0	9	36	4	0.5680	20
		2 X 1	✓	✓	43.9 51.3	14	28	2	0.6476	18
		2 X 1 1/4	✓	✓	48.3 53.3	10	20	2	0.6888	14
		2 X 1 1/2	✓	✓	51.3 54.9	10	20	2	0.7380	15
		2 1/2 X 1/2	✓	✓	45.0 60.0	10	20	2	0.7900	16
		2 1/2 X 3/4	✓	✓	48.0 60.0	10	20	2	0.7900	16
		2 1/2 X 1	✓	✓	55.0 63.0	8	16	2	0.9900	16
		2 1/2 X 1 1/4	✓	✓	51.5 61.4	8	16	2	1.0200	16
		2 1/2 X 1 1/2	✓	✓	54.9 63.8	6	12	2	1.0000	12
		2 1/2 X 2	✓	✓	60.7 66.0	6	12	2	1.2040	14
		3 X 1	✓	✓	- -	4	8	2	1.2360	10
		3 X 1 1/2	✓	✓	58.0 71.0	4	8	2	1.2750	10
		3 X 2	✓	✓	64.0 73.4	4	8	2	1.6248	13
		3 X 2 1/2	✓	✓	71.9 75.9	4	8	2	1.9748	16
		4 X 2	✓	✓	69.1 87.5	2	4	2	2.6270	11
		4 X 2 1/2	✓	✓	77.2 89.1	1	2	2	2.5800	5
		4 X 3	✓	✓	83.8 91.4	1	2	2	3.3780	7
		6 X 4	✓	✓	102.0 125.0	-	1	1	7.7800	8

REDUCING TEES

130R

RT

Size (inch)	◀FM▶	PL	Dimensions			Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/ Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
			A	B	C					
1/4 X 1/8	✓	✓	18.8	18.8	19.3	25	300	12	0.0601	18
3/8 X 1/8	✓	✓	22.4	20.6	21.6	90	360	4	0.0730	26
3/8 X 1/4	✓	✓	22.4	22.4	22.9	60	240	4	0.0979	23
1/2 X 1/8	✓	✓	21.9	21.9	23.5	40	160	4	0.1080	17
1/2 X 1/4	✓	✓	24.6	24.6	24.9	40	160	4	0.1248	20
1/2 X 3/8	✓	✓	25.9	25.9	25.7	40	160	4	0.1350	22
3/4 X 1/8	✓	✓	24.0	24.0	25.7	32	128	4	0.1520	19
3/4 X 1/4	✓	✓	26.7	26.7	27.4	25	100	4	0.1746	17
3/4 X 3/8	✓	✓	27.9	27.9	28.1	25	100	4	0.1800	18
3/4 X 1/2	✓	✓	29.9	29.9	30.4	20	80	4	0.2239	18
1 X 1/4	✓	✓	27.6	27.6	30.4	20	80	4	0.2398	19
1 X 3/8	✓	✓	30.0	30.0	32.3	15	60	4	0.2730	16
1 X 1/2	✓	✓	31.4	31.4	34.8	15	60	4	0.3060	18
1 X 3/4	✓	✓	34.8	34.8	36.8	12	48	4	0.3484	17
1 1/4 X 1/4	✓	✓	30.0	30.0	36.6	20	40	2	0.3450	14
1 1/4 X 3/8	✓	✓	32.0	32.0	36.6	20	40	2	0.4009	16
1 1/4 X 1/2	✓	✓	34.0	34.0	38.9	20	40	2	0.4206	17
1 1/4 X 3/4	✓	✓	36.8	36.8	41.2	20	40	2	0.4719	19
1 1/4 X 1	✓	✓	40.1	40.1	42.2	20	40	2	0.5369	21
1 1/2 X 3/8	✓	✓	40.1	40.1	40.2	18	36	2	0.4450	16
1 1/2 X 1/2	✓	✓	35.8	35.8	42.2	18	36	2	0.4840	17
1 1/2 X 3/4	✓	✓	35.8	35.8	44.5	15	30	2	0.5320	16
1 1/2 X 1	✓	✓	41.9	41.9	45.7	10	30	3	0.6168	19
1 1/2 X 1 1/4	✓	✓	41.9	41.9	47.8	12	24	2	0.6906	17
2 X 3/8	✓	✓	36.8	36.8	46.5	10	20	2	0.6600	13
2 X 1/2	✓	✓	37.9	37.9	47.8	10	20	2	0.6768	14
2 X 3/4	✓	✓	40.6	40.6	50.0	10	20	2	0.7980	16
2 X 1	✓	✓	43.9	43.9	51.3	10	20	2	0.8096	16
2 X 1 1/4	✓	✓	47.3	47.3	52.2	8	16	2	0.9056	14
2 X 1 1/2	✓	✓	50.3	50.3	53.8	8	16	2	1.0662	17
2 1/2 X 1/2	✓	✓	40.2	40.2	55.9	6	12	2	1.2800	3
2 1/2 X 3/4	✓	✓	44.2	44.2	58.9	6	12	2	1.2680	15
2 1/2 X 1	✓	✓	46.5	46.5	59.0	5	10	2	1.3776	14
2 1/2 X 1 1/4	✓	✓	47.5	47.5	62.2	5	10	2	1.4808	15
2 1/2 X 1 1/2	✓	✓	54.9	54.9	63.8	5	10	2	1.5068	15
2 1/2 X 2	✓	✓	60.7	60.7	66.0	4	8	2	1.7044	14
3 X 1/2	✓	✓	46.5	46.5	65.0	* 4	8	2	1.7130	14
3 X 3/4	✓	✓	45.5	45.5	65.3	3	6	2	1.3280	8
3 X 1	✓	✓	50.8	50.8	67.6	3	6	2	1.9765	12
3 X 1 1/4	✓	✓	55.1	55.1	69.6	3	6	2	1.6976	10
3 X 1 1/2	✓	✓	58.2	58.2	71.1	3	6	2	2.1740	13
3 X 2	✓	✓	64.0	64.0	73.4	3	6	2	2.3873	14
3 X 2 1/2	✓	✓	71.9	71.9	76.0	3	6	2	2.7200	16
4 X 1/2	✓	✓	53.5	53.5	79.2	2	4	2	2.5000	10
4 X 3/4	✓	✓	53.5	53.5	79.2	2	4	2	2.7500	11
4 X 1	✓	✓	57.0	57.0	85.4	2	4	2	3.0466	12
4 X 1 1/4	✓	✓	61.0	61.0	86.5	2	4	2	3.1120	12
4 X 1 1/2	✓	✓	62.5	62.5	82.6	2	4	2	3.4200	14
4 X 2	✓	✓	68.2	68.2	84.9	-	3	1	3.6770	11
4 X 2 1/2	✓	✓	77.5	77.5	89.2	-	3	1	4.1900	13
4 X 3	✓	✓	82.1	82.1	89.6	1	2	2	4.1920	8
5 X 3	✓	✓	89.2	89.2	107.2	1	2	2	5.1000	10
5 X 4	✓	✓	100.0	100.0	111.0	-	1	1	6.1000	6
6 X 2	✓	✓	78.2	78.2	115.8	-	1	1	7.0000	7
6 X 2 1/2	✓	✓	86.1	86.1	118.4	-	1	1	7.3500	7
6 X 3	✓	✓	92.5	92.5	120.7	-	1	1	8.5880	9
6 X 4	✓	✓	104.9	104.9	125.5	-	1	1	8.8852	9
6 X 5	✓	✓	116.0	116.0	128.0	-	1	1	10.5000	11
1/2 X 1/4 X 1/2	✓	✓	28.4	24.9	28.4	30	120	4	0.1430	17
1/2 X 1/2 X 3/4	✓	✓	31.0	31.0	30.5	30	120	4	0.1973	24
1/2 X 1/2 X 1	✓	✓	34.6	34.6	32.0	25	100	4	0.2422	24
3/4 X 1/2 X 1/2	✓	✓	29.9	27.9	30.4	25	100	4	0.1820	18
3/4 X 1/2 X 3/4	✓	✓	32.6	30.4	32.6	20	80	4	0.2224	18
3/4 X 1/2 X 1	✓	✓	36.1	34.8	34.1	18	72	4	0.2900	21
3/4 X 3/4 X 1	✓	✓	36.8	36.8	34.8	40	80	2	0.2956	24
3/4 X 3/4 X 1 1/4	✓	✓	41.1	41.1	36.8	20	60	3	0.3520	21
3/4 X 3/4 X 1 1/2	✓	✓	42.1	42.1	37.9	12	36	3	0.4050	15



MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.

150lbs.



SIAM FITTINGS

REDUCING TEES

130R

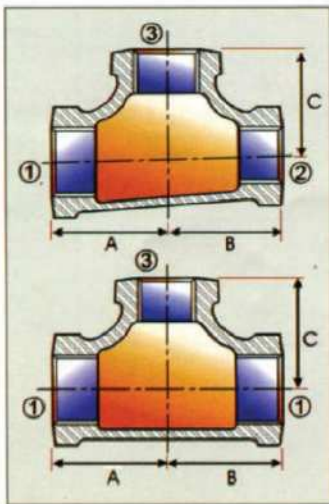
RT

Size
(inch)

FM VL

Dimensions

A B C

Inner Box
Pcs./BoxMaster Ctn.
Pcs./Ctn.NO. of
Inner BoxWeight/
Pcs.(Kgs.)N.W./Ctn.
(Kgs.)

1 X 1/2 X 1/2	✓	✓
1 X 1/2 X 3/4	✓	✓
1 X 1/2 X 1	✓	✓
1 X 3/4 X 1/2	✓	✓
1 X 3/4 X 3/4	✓	✓
1 X 3/4 X 1	✓	✓
1 X 1 X 1/4	✓	✓
1 X 1 X 1/2	✓	✓
1 X 1 X 2	✓	✓
1 1/4 X 1/2 X 1/2	✓	✓
1 1/4 X 1/2 X 3/4	✓	✓
1 1/4 X 1/2 X 1	✓	✓
1 1/4 X 1/2 X 1 1/4	✓	✓
1 1/4 X 3/4 X 1/2	✓	✓
1 1/4 X 3/4 X 3/4	✓	✓
1 1/4 X 3/4 X 1	✓	✓
1 1/4 X 3/4 X 1 1/4	✓	✓
1 1/4 X 1 X 1/2	✓	✓
1 1/4 X 1 X 3/4	✓	✓
1 1/4 X 1 X 1	✓	✓
1 1/4 X 1 X 1 1/4	✓	✓
1 1/4 X 1 X 1 1/2	✓	✓
1 1/4 X 1 1/4 X 1 1/2	✓	✓
1 1/4 X 1 1/4 X 2	✓	✓

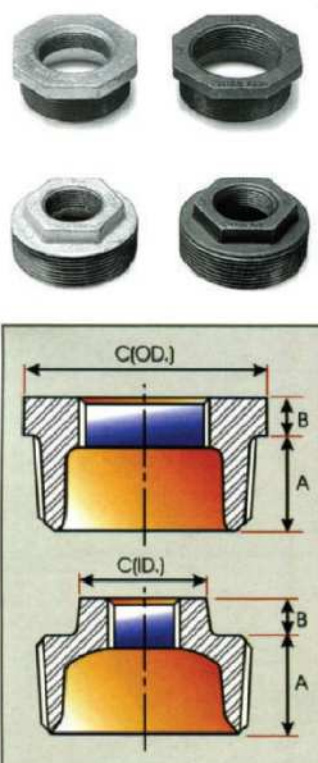
31.4	27.9	34.8	20	80	4	0.2282	18
34.1	30.4	36.1	20	80	4	0.2972	24
37.3	34.8	37.3	15	60	4	0.3324	20
31.4	29.9	34.8	20	80	4	0.2848	23
34.1	32.6	36.1	15	60	4	0.2742	16
38.1	36.8	38.1	30	60	2	0.3748	22
42.4	42.4	40.1	11	44	4	0.4150	18
45.7	45.7	41.9	9	36	4	0.5230	19
50.3	50.3	47.9	12	24	2	0.6420	15
34.0	32.0	38.9	25	50	2	0.3048	15
37.0	32.0	39.5	25	50	2	0.3600	18
40.1	34.5	42.4	20	40	2	0.4010	16
43.6	38.1	43.6	20	40	2	0.4976	20
36.1	32.6	40.3	10	40	4	0.3418	14
36.1	32.6	40.4	10	40	4	0.4086	16
39.3	36.1	41.5	10	40	4	0.4420	18
44.5	41.2	44.5	20	40	2	0.4992	20
33.3	31.4	38.1	20	40	2	0.3564	14
36.1	34.1	40.4	20	40	2	0.3866	15
39.3	37.3	41.5	20	40	2	0.4706	19
44.5	42.4	44.5	15	30	2	0.5440	16
49.3	42.4	49.3	18	36	2	0.5172	19
47.8	47.8	46.2	12	24	2	0.6270	15
53.3	53.3	48.3	12	24	2	0.7788	19
36.5	28.5	42.6	12	48	4	0.3250	16
41.9	38.6	49.3	18	36	2	0.5400	19
48.0	43.5	50.0	15	30	2	0.6540	20
49.3	42.2	49.3	12	24	2	0.6193	15
35.5	29.5	42.5	15	30	2	0.4108	12
38.3	32.3	41.6	15	30	2	0.3746	11
45.5	40.0	49.0	12	24	2	0.6428	15
48.3	43.6	48.3	12	24	2	0.5840	14
36.0	32.0	46.0	15	30	2	0.4000	12
37.8	34.2	44.0	15	30	2	0.5125	15
41.9	38.1	45.7	15	30	2	0.5050	15
46.2	42.4	47.8	12	24	2	0.5600	13
49.3	45.7	49.3	12	24	2	0.6328	15
35.8	34.0	42.2	12	24	2	0.4530	11
38.6	36.3	44.5	12	24	2	0.5100	12
41.1	39.3	44.8	12	24	2	0.5852	14
46.2	44.5	47.8	12	24	2	0.7320	18
48.3	46.8	48.3	12	24	2	0.7047	17
55.5	51.5	53.4	8	16	2	0.8500	14
53.8	53.8	50.3	8	16	2	0.8788	14

2 X 1/2 X 2	✓	✓
2 X 3/4 X 3/4	✓	✓
2 X 3/4 X 2	✓	✓
2 X 1 X 1	✓	✓
2 X 1 X 1 1/2	✓	✓
2 X 1 X 2	✓	✓
2 X 1 1/4 X 1	✓	✓
2 X 1 1/4 X 1 1/4	✓	✓
2 X 1 1/4 X 1 1/2	✓	✓
2 X 1 1/4 X 2	✓	✓
2 X 1 1/2 X 1/2	✓	✓
2 X 1 1/2 X 3/4	✓	✓
2 X 1 1/2 X 1	✓	✓
2 X 1 1/2 X 1 1/4	✓	✓
2 X 1 1/2 X 1 1/2	✓	✓
2 X 1 1/2 X 2	✓	✓
2 X 2 X 2 1/2	✓	✓
2 1/2 X 2 X 2	✓	✓
2 1/2 X 2 X 2 1/2	✓	✓

56.1	46.8	56.1	8	16	2	0.8908	14
41.5	33.0	49.0	12	24	2	0.5334	13
57.2	50.0	57.2	8	16	2	0.9928	16
44.0	40.0	53.0	12	24	2	0.6740	16
50.3	44.8	53.8	10	20	2	0.7960	16
56.1	50.3	56.1	8	16	2	0.9628	15
46.0	40.0	51.5	8	16	2	0.7498	12
47.3	43.6	52.2	8	16	2	0.8940	14
53.1	47.8	54.9	8	16	2	0.7760	12
57.2	53.3	57.2	8	16	2	1.0000	16
48.3	38.9	48.5	10	20	2	0.7400	15
41.5	37.1	50.3	10	20	2	0.7200	14
43.9	41.9	51.3	10	20	2	0.8028	16
47.3	45.3	52.2	8	16	2	0.7600	12
50.3	48.3	53.8	8	16	2	0.8152	13
56.1	53.7	56.1	8	16	2	1.0292	16
64.7	64.7	59.5	6	12	2	1.4800	18
59.5	56.0	64.7	5	10	2	1.4870	15
68.6	66.0	68.6	4	8	2	1.8502	15

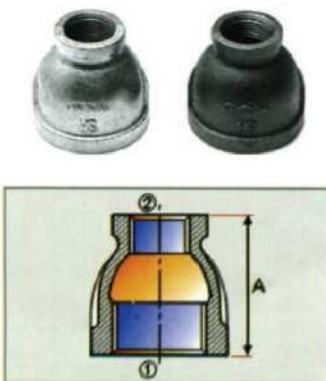
MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.

BUSHINGS

241	BU	Size (inch)	FM	UL	Dimensions				Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/ Pcs.(Kgs.)	N.W./Ctn. (Kgs.)
					A	B	C(id)	C(od)					
		1/4 X 1/8	✓	✓	13.2	3.8	-	16.3	120	1440	12	0.0130	19
		3/8 X 1/8	✓	✓	12.2	4.1	-	21.6	75	900	12	0.0250	23
		3/8 X 1/4	✓	✓	12.2	4.1	-	21.1	75	900	12	0.0201	18
		1/2 X 1/8	✓	✓	16.4	4.8	-	26.2	150	600	4	0.0492	30
		1/2 X 1/4	✓	✓	14.2	4.8	-	26.2	150	600	4	0.0425	26
		1/2 X 3/8	✓	✓	14.2	4.8	-	26.2	150	600	4	0.0352	21
		3/4 X 1/8	✓	✓	16.0	5.6	-	29.2	75	300	4	0.0758	23
		3/4 X 1/4	✓	✓	16.0	5.6	-	29.2	75	300	4	0.0616	18
		3/4 X 3/8	✓	✓	16.0	5.6	-	29.2	75	300	4	0.0524	16
		3/4 X 1/2	✓	✓	18.0	5.6	-	29.2	75	300	4	0.0500	15
		1 X 1/8	✓	✓	19.1	9.6	28.5	-	50	200	4	0.0938	19
		1 X 1/4	✓	✓	19.1	9.6	28.5	-	50	200	4	0.0910	18
		1 X 3/8	✓	✓	19.1	9.6	28.5	-	50	200	4	0.0862	17
		1 X 1/2	✓	✓	21.6	6.4	-	36.1	50	200	4	0.1044	21
		1 X 3/4	✓	✓	21.6	6.4	-	36.1	50	200	4	0.0844	17
		1 1/4 X 1/4	✓	✓	22.8	8.6	28.5	-	30	120	4	0.1338	16
		1 1/4 X 3/8	✓	✓	22.8	8.6	28.5	-	30	120	4	0.1200	14
		1 1/4 X 1/2	✓	✓	22.8	8.6	31.5	-	30	120	4	0.1474	18
		1 1/4 X 3/4	✓	✓	20.3	7.1	-	44.7	30	120	4	0.1864	22
		1 1/4 X 1	✓	✓	20.3	7.1	-	44.7	30	120	4	0.1350	16
		1 1/2 X 1/8	✓	✓	21.1	9.4	28.4	-	25	75	3	0.2950	22
		1 1/2 X 1/4	✓	✓	23.6	9.4	28.5	-	25	75	3	0.1790	13
		1 1/2 X 3/8	✓	✓	23.6	9.4	28.5	-	25	75	3	0.1740	13
		1 1/2 X 1/2	✓	✓	23.6	9.4	34.0	-	25	75	3	0.1936	15
		1 1/2 X 3/4	✓	✓	23.6	9.4	36.5	-	25	75	3	0.1892	14
		1 1/2 X 1	✓	✓	23.3	7.9	-	50.8	25	75	3	0.2160	16
		1 1/2 X 1 1/4	✓	✓	23.3	7.9	-	50.8	25	75	3	0.1471	11
		2 X 1/4	✓	✓	21.8	10.6	28.5	-	20	60	3	0.2732	16
		2 X 3/8	✓	✓	22.4	10.0	28.5	-	20	60	3	0.2784	26
		2 X 1/2	✓	✓	24.9	10.4	34.0	-	20	60	3	0.2832	17
		2 X 3/4	✓	✓	24.9	10.4	41.4	-	20	60	3	0.3150	19
		2 X 1	✓	✓	24.9	10.4	45.0	-	20	60	3	0.3080	18
		2 X 1 1/4	✓	✓	27.0	11.0	-	63.0	20	60	3	0.3840	23
		2 X 1 1/2	✓	✓	27.0	11.0	-	63.0	20	60	3	0.3155	19
		2 1/2 X 1/2	✓	✓	27.2	11.2	34.0	-	15	30	2	0.7130	21
		2 1/2 X 3/4	✓	✓	27.2	11.2	41.4	-	15	30	2	0.4328	13
		2 1/2 X 1	✓	✓	27.2	11.2	49.5	-	15	30	2	0.4576	14
		2 1/2 X 1 1/4	✓	✓	27.2	11.2	60.7	-	15	30	2	0.4973	15
		2 1/2 X 1 1/2	✓	✓	27.2	11.2	-	75.7	15	30	2	0.6208	19
		2 1/2 X 2	✓	✓	29.7	9.4	-	75.7	15	30	2	0.4460	13
		3 X 1/2	✓	✓	28.7	12.2	34.0	-	12	24	2	1.0100	24
		3 X 3/4	✓	✓	28.7	12.2	41.4	-	12	24	2	0.6180	15
		3 X 1	✓	✓	28.7	12.2	49.5	-	12	24	2	0.6536	16
		3 X 1 1/4	✓	✓	28.7	12.2	60.7	-	12	24	2	0.7950	19
		3 X 1 1/2	✓	✓	28.7	12.2	68.1	-	12	24	2	0.7576	18
		3 X 2	✓	✓	28.7	12.2	-	98.0	12	24	2	0.9220	22
		3 X 2 1/2	✓	✓	28.7	12.2	-	98.0	12	24	2	0.8360	20
		3 1/2 X 1 1/2	✓	✓	30.0	13.2	70.0	-	8	16	2	1.0000	16
		3 1/2 X 2	✓	✓	33.0	13.2	83.3	-	8	16	2	1.1500	18
		3 1/2 X 3	✓	✓	30.0	10.9	-	117.3	8	16	2	0.8488	14
		4 X 1/2	✓	✓	39.8	14.2	-	121.0	5	10	2	1.6600	17
		4 X 3/4	✓	✓	38.0	13.0	-	121.0	5	10	2	1.4650	15
		4 X 1	✓	✓	31.0	15.2	-	-	5	10	2	1.1620	12
		4 X 1 1/4	✓	✓	31.0	15.2	60.7	-	5	10	2	1.3712	14
		4 X 1 1/2	✓	✓	31.0	15.2	68.1	-	5	10	2	1.0866	11
		4 X 2	✓	✓	36.0	15.2	83.3	-	5	10	2	1.3592	14
		4 X 2 1/2	✓	✓	31.0	15.2	98.0	-	5	10	2	1.5376	15
		4 X 3	✓	✓	37.0	14.0	-	126.0	5	10	2	1.6804	17
		5 X 2	✓	✓	33.3	15.2	83.3	-	2	4	2	2.8800	12
		5 X 3	✓	✓	42.5	15.5	117.3	-	2	4	2	2.3390	9
		5 X 4	✓	✓	41.7	15.5	-	146.8	2	4	2	2.2326	9
		6 X 2	✓	✓	35.6	19.1	83.3	-	2	4	2	4.2900	17
		6 X 2 1/2	✓	✓	35.6	19.1	98.0	-	2	4	2	3.8770	16
		6 X 3	✓	✓	35.6	19.1	117.3	-	2	4	2	2.7400	11
		6 X 4	✓	✓	40.0	19.1	147.1	-	2	4	2	3.2220	13
		6 X 5	✓	✓	35.6	19.1	-	179.1	2	4	2	3.1260	13

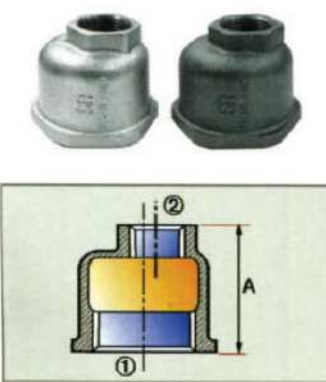
MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.

REDUCING COUPLINGS

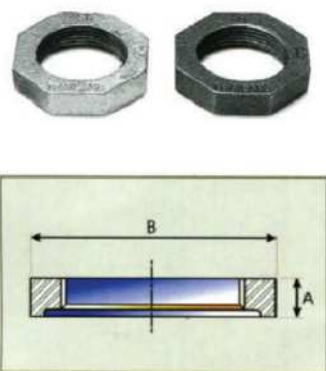
240	RS	Size (inch)	◀FM▶ UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
									
		1/4 X 1/8	✓ ✓	25.4	50	600	12	0.0337	20
		3/8 X 1/8	✓ ✓	28.7	35	420	12	0.0458	19
		3/8 X 1/4	✓ ✓	28.7	30	360	12	0.0478	17
		1/2 X 1/8	✓ ✓	31.8	75	300	4	0.0713	21
		1/2 X 1/4	✓ ✓	31.2	75	300	4	0.0736	22
		1/2 X 3/8	✓ ✓	31.2	60	240	4	0.0741	18
		3/4 X 1/8	✓ ✓	36.6	70	210	3	0.0910	19
		3/4 X 1/4	✓ ✓	36.6	45	180	4	0.1050	19
		3/4 X 3/8	✓ ✓	35.9	45	180	4	0.0956	17
		3/4 X 1/2	✓ ✓	35.9	60	180	3	0.1194	21
		1 X 1/4	✓ ✓	42.0	45	135	3	0.1438	19
		1 X 3/8	✓ ✓	42.0	30	120	4	0.1560	19
		1 X 1/2	✓ ✓	42.0	30	120	4	0.1794	22
		1 X 3/4	✓ ✓	42.0	25	100	4	0.1848	18
		1 1/4 X 3/8	✓ ✓	52.3	25	75	3	0.2250	17
		1 1/4 X 1/2	✓ ✓	52.3	25	75	3	0.2374	18
		1 1/4 X 3/4	✓ ✓	52.3	25	75	3	0.2618	20
		1 1/4 X 1	✓ ✓	52.3	15	60	4	0.3014	18
		1 1/2 X 3/8	✓ ✓	58.7	30	60	2	0.2670	16
		1 1/2 X 1/2	✓ ✓	57.5	20	60	3	0.3014	18
		1 1/2 X 3/4	✓ ✓	57.5	15	60	4	0.3226	19
		1 1/2 X 1	✓ ✓	57.5	25	50	2	0.4506	23
		1 1/2 X 1 1/4	✓ ✓	57.5	12	48	4	0.4034	19
		2 X 3/8	✓ ✓	71.4	12	36	3	0.4400	16
		2 X 1/2	✓ ✓	70.0	12	36	3	0.4516	16
		2 X 3/4	✓ ✓	70.0	12	36	3	0.4576	16
		2 X 1	✓ ✓	70.0	12	36	3	0.4798	17
		2 X 1 1/4	✓ ✓	70.0	9	27	3	0.4952	13
		2 X 1 1/2	✓ ✓	70.0	9	27	3	0.6271	17
		2 1/2 X 1/2	✓ ✓	82.6	10	20	2	0.7780	16
		2 1/2 X 3/4	✓ ✓	80.9	10	20	2	0.8864	18
		2 1/2 X 1	✓ ✓	80.9	10	20	2	0.7954	16
		2 1/2 X 1 1/4	✓ ✓	82.6	10	20	2	0.8336	17
		2 1/2 X 1 1/2	✓ ✓	82.6	7	14	2	1.0136	14
		2 1/2 X 2	✓ ✓	82.6	7	14	2	1.0880	15
		3 X 1/2	✓ ✓	91.8	7	14	2	1.3100	18
		3 X 3/4	✓ ✓	91.8	7	14	2	1.3133	18
		3 X 1	✓ ✓	91.8	6	12	2	1.4100	17
		3 X 1 1/4	✓ ✓	91.8	6	12	2	1.3476	16
		3 X 1 1/2	✓ ✓	91.8	6	12	2	1.3547	16
		3 X 2	✓ ✓	93.7	6	12	2	1.4707	18
		3 X 2 1/2	✓ ✓	93.7	5	10	2	1.6520	17
		4 X 1/2	✓ ✓	109.1	3	6	2	1.7000	10
		4 X 3/4	✓ ✓	109.1	3	6	2	1.7000	10
		4 X 1	✓ ✓	111.3	3	6	2	2.3800	14
		4 X 1 1/4	✓ ✓	111.3	3	6	2	1.6600	10
		4 X 1 1/2	✓ ✓	111.3	3	6	2	1.7400	10
		4 X 2	✓ ✓	111.3	3	6	2	2.4833	15
		4 X 2 1/2	✓ ✓	111.3	3	6	2	2.4960	15
		4 X 3	✓ ✓	111.3	3	6	2	2.5880	16
		5 X 2		129.0	-	4	1	2.9000	12
		5 X 3		129.0	-	2	1	3.1000	6
		5 X 4		129.0	-	2	1	4.8470	10
		6 X 2		147.5	-	2	1	4.0000	8
		6 X 2 1/2		147.5	-	2	1	4.4500	9
		6 X 3		147.5	-	2	1	6.2100	12
		6 X 4		147.5	1	2	2	6.6680	13
		6 X 5		147.5	1	2	2	4.5000	9

MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.


ECCENTRIC REDUCERS

ERS	Size (inch)	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
	3/4 X 1/2	39	60	180	3	0.1194	21
	1 X 3/4	45	25	100	4	0.1848	18
	1 1/4 X 3/4	50	25	75	3	0.2618	20
	1 1/4 X 1	50	15	60	4	0.3014	18
	1 1/2 X 3/4	55	15	60	4	0.3226	19
	1 1/2 X 1	55	25	50	2	0.4506	23
	1 1/2 X 1 1/4	55	12	48	4	0.4084	19
	2 X 3/4	65	12	36	3	0.4576	16
	2 X 1	65	12	36	3	0.4798	17
	2 X 1 1/4	65	9	27	3	0.4952	13
	2 X 1 1/2	65	9	27	3	0.6271	17

LOCKNUTS


312	LN	Size (inch)	UL	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	✓	5.0 17.5	250	3000	12	0.0080	24
		1/4	✓	6.6 21.3	125	1500	12	0.0117	18
		3/8	✓	7.3 25.4	125	1500	12	0.0150	23
		1/2	✓	8.1 30.0	150	600	4	0.0387	23
		3/4	✓	8.8 36.3	90	360	4	0.0526	19
		1	✓	9.9 44.5	60	240	4	0.0826	20
		1 1/4	✓	10.9 53.3	45	180	4	0.1220	22
		1 1/2	✓	12.1 59.7	45	135	3	0.2084	28
		2	✓	13.7 73.2	25	75	3	0.2680	19
		2 1/2	✓	15.2 98.0	20	40	2	0.5150	21
		3	✓	17.2 117.3	20 *	40	2	0.6090	24
		4	✓	20.5 147.1	7	14	2	0.7530	11
		5		27.0 180.0	5	10	2	2.1980	22
		6		30.9 210.0	4	8	2	3.1920	26

WASTENUTS


WN	Size (inch)	Dimensions A B C D F	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
	1/2	62.0 6.0 4.4 46.0 6.0	90	360	4	0.0540	19
	3/4	73.0 10.5 5.0 54.0 7.3	80	240	3	0.0800	19
	1	84.1 11.2 4.8 65.1 7.2	50	200	4	0.0960	19
	1 1/4	100.0 12.7 5.6 77.8 8.7	30	120	4	0.1450	17
	1 1/2	109.5 14.3 6.4 87.3 8.7	50	100	2	0.1890	19
	2	130.2 16.0 7.2 104.8 8.7	30	60	2	0.2850	17

MALLEABLE IRON PIPE FITTINGS CLASS 150 lbs.


MALLEABLE IRON PIPE FITTINGS CLASS 300 lbs.
ELBOWS 90°

90	XHL90	Size (inch)	FM	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/4	✓	23.9	180	360	2	0.0946	34
		3/8	✓	26.9	120	240	2	0.1376	33
		1/2	✓	31.7	40	80	2	0.2140	17
		3/4	✓	36.6	30	60	2	0.3413	20
		1	✓	41.4	20	40	2	0.5200	21
		1 1/4	✓	49.3	12	24	2	0.8450	20
		1 1/2	✓	54.1	8	16	2	1.1000	18
		2	✓	63.5	6	12	2	1.8016	22
		2 1/2	✓	74.7	4	8	2	2.8230	23
		3	✓	85.8	2	4	2	4.3450	17
		4	✓	105.0	1	2	2	6.7200	13

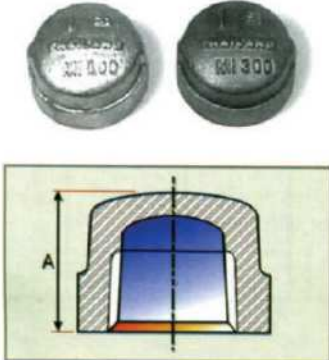
ELBOWS 45°

120	XHL45	Size (inch)	FM	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/4	✓	20.6	180	360	2	0.0880	32
		3/8	✓	22.3	120	240	2	0.1300	31
		1/2	✓	25.4	40	80	2	0.1941	16
		3/4	✓	28.7	30	60	2	0.3096	19
		1	✓	33.3	20	40	2	0.4786	19
		1 1/4	✓	38.1	12	24	2	0.7584	18
		1 1/2	✓	42.9	8	16	2	0.9860	16
		2	✓	50.8	6	12	2	1.6416	20
		2 1/2	✓	57.1	4	8	2	2.5570	20
		3	✓	63.5	2	4	2	3.9724	16
		4	✓	71.0	1	2	2	5.6800	11

STREET ELBOWS 90°

92	XHSL90	Size (inch)	FM	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
 		1/4	✓	36.6 23.9	180	360	2	0.0696	25
		3/8	✓	41.4 26.9	120	240	2	0.1162	28
		1/2	✓	50.8 31.7	40	80	2	0.1820	15
		3/4	✓	55.6 36.6	30	60	2	0.2858	17
		1	✓	65.0 41.4	20	40	2	0.4660	19
		1 1/4	✓	73.1 49.3	12	24	2	0.7638	18
		1 1/2	✓	79.5 54.1	8	16	2	1.0020	16
		2	✓	93.7 63.5	6	12	2	1.6500	20
		4	✓	148.0 105.0	1	2	2	6.3800	12

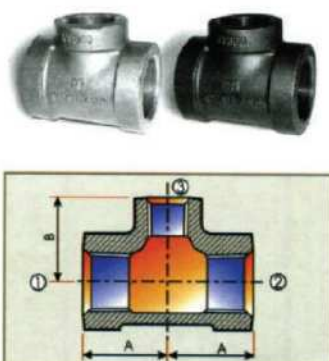
CAPS


300	XHCA	Size (inch)	◀FM▶ UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		3/8	✓	21.1	120	240	2	0.0620	15
		1/2	✓	24.9	80	160	2	0.0994	16
		3/4	✓	27.4	50	100	2	0.1524	15
		1	✓	32.0	30	60	2	0.2450	15
		1 1/4	✓	35.0	20	40	2	0.3992	16
		1 1/2	✓	36.3	15	30	2	0.5014	15
		2	✓	42.7	10	20	2	0.8420	17
		2 1/2	✓	56.0	8	16	2	1.3260	21
		3	✓	60.0	5	10	2	2.1080	20
		4	✓	70.0	3	6	2	3.1370	19

UNIONS CONICAL BRASS SEAT


342	XHCU	Size (inch)	◀FM▶ UL	Dimensions A B	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		1/8	✓	18.0 16.0 18.0	200	400	2	0.1040	52
		1/4	✓	19.5 17.5 22.0	120	240	2	0.1464	35
		3/8	✓	22.5 19.0 24.2	90	180	2	0.2080	37
		1/2	✓	24.5 20.0 27.0	40	80	2	0.2760	22
		3/4	✓	27.5 21.0 29.0	30	60	2	0.3866	23
		1	✓	29.0 23.0 32.5	18	36	2	0.6474	23
		1 1/4	✓	33.0 26.0 38.0	12	24	2	0.9184	22
		1 1/2	✓	35.5 29.0 41.5	10	20	2	1.1435	23
		2	✓	42.0 32.0 45.0	6	12	2	1.8716	22
		2 1/2	✓	43.5 37.0 51.0	4	8	2	3.0150	24
		3	✓	55.5 43.0 58.0	3	6	2	4.8440	29
		4	✓	61.5 54.0 64.5	1	2	2	8.4500	17

REDUCING TEES


150R	XHRT	Size (inch)	◀FM▶ UL	Dimensions A B C	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
		3/4 x 3/4 x 1/2	✓	33.3 33.3 35.0	30	60	2	0.4152	25
		1 x 1 x 1/2	✓	36.6 36.6 38.1	16	32	2	0.5746	18
		1 x 1 x 3/4	✓	38.1 38.1 39.6	15	30	2	0.6345	19
		1 1/4 x 1 1/4 x 1/2	✓	38.1 38.1 42.9	12	24	2	0.9170	22
		1 1/4 x 1 1/4 x 3/4	✓	41.4 41.4 44.4	12	24	2	0.9070	22
		1 1/4 x 1 1/4 x 1	✓	44.4 44.4 46.0	12	24	2	1.0100	24
		1 1/2 x 1 1/2 x 1/2	✓	41.4 41.4 46.0	10	20	2	1.0580	21
		1 1/2 x 1 1/2 x 3/4	✓	42.9 42.9 47.7	10	20	2	1.1130	22
		1 1/2 x 1 1/2 x 1	✓	46.0 46.0 50.8	10	20	2	1.2312	25
		1 1/2 x 1 1/2 x 1 1/4	✓	50.8 50.8 52.3	8	16	2	1.4088	23
		2 x 2 x 1/2	✓	44.4 44.4 52.3	6	12	2	1.6028	19
		2 x 2 x 3/4	✓	46.0 46.0 54.1	6	12	2	1.6380	20
		2 x 2 x 1	✓	50.8 50.8 57.1	5	10	2	1.7900	18
		2 x 2 x 1 1/4	✓	54.1 54.1 60.4	5	10	2	1.9600	20
		2 x 2 x 1 1/2	✓	57.1 57.1 58.7	5	10	2	2.1400	21
		2 1/2 x 2 1/2 x 2	✓	68.3 68.3 69.8	4	8	2	1.5060	12
		3 x 3 x 2	✓	71.4 71.4 79.5	2	4	2	4.3860	18

TEES**130****XHT**

Size (inch)	FM	UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
1/4	✓	✓	23.9	120	240	2	0.1332	32
3/8	✓	✓	26.9	90	180	2	0.1941	35
1/2	✓	✓	31.7	30	60	2	0.3066	18
3/4	✓	✓	36.6	20	40	2	0.4887	20
1	✓	✓	41.4	12	24	2	0.7101	17
1 1/4	✓	✓	49.3	10	20	2	1.1340	23
1 1/2	✓	✓	54.1	6	12	2	1.5140	18
2	✓	✓	63.5	4	8	2	2.3675	19
2 1/2	✓	✓	74.7	2	4	2	3.9300	16
3	✓	✓	85.8	1	2	2	5.8400	12
4	✓	✓	105.0	1	2	2	9.3580	17

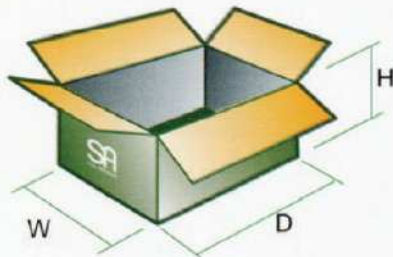
COUPLINGS**320****XHS**

Size (inch)	FM	UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
1/4	✓	✓	34.8	200	400	2	0.0762	30
3/8	✓	✓	41.1	150	300	2	0.1196	36
1/2	✓	✓	47.5	40	80	2	0.1891	15
3/4	✓	✓	53.8	30	60	2	0.2958	18
1	✓	✓	60.2	20	40	2	0.4580	18
1 1/4	✓	✓	72.9	12	24	2	0.7628	18
1 1/2	✓	✓	72.9	12	24	2	0.9210	22
2	✓	✓	91.9	6	12	2	1.5833	19
2 1/2	✓	✓	104.6	4	8	2	2.4850	20
3	✓	✓	104.6	2	4	2	3.4398	14
4	✓	✓	108.0	2	4	2	4.7000	19

REDUCING COUPLINGS**240****XHRS**

Size (inch)	FM	UL	Dimensions A	Inner Box Pcs./Box	Master Ctn. Pcs./Ctn.	NO. of Inner Box	Weight/Pcs. (Kgs.)	N.W./Ctn. (Kgs.)
3/8 x 1/4	✓	✓	-	120	240	2	0.0940	23
1/2 x 1/4	✓	✓	42.9	100	200	2	0.1420	28
1/2 x 3/8	✓	✓	42.9	100	200	2	0.1556	31
3/4 x 3/8	✓	✓	44.5	60	120	2	0.2080	25
3/4 x 1/2	✓	✓	44.5	60	120	2	0.2270	27
1 x 1/2	✓	✓	50.8	50	100	2	0.3237	32
1 x 3/4	✓	✓	50.8	40	80	2	0.3586	29
1 1/4 x 1/2	✓	✓	60.5	24	48	2	0.5040	24
1 1/4 x 3/4	✓	✓	60.5	20	40	2	0.5400	22
1 1/4 x 1	✓	✓	60.5	20	40	2	0.5714	23
1 1/2 x 1/2	✓	✓	68.3	24	48	2	0.6532	31
1 1/2 x 3/4	✓	✓	68.3	20	40	2	0.6970	28
1 1/2 x 1	✓	✓	68.3	18	36	2	0.7364	27
1 1/2 x 1 1/4	✓	✓	68.3	18	36	2	0.8200	30
2 x 1/2	✓	✓	81.0	12	24	2	1.0776	26
2 x 3/4	✓	✓	81.0	12	24	2	1.0696	26
2 x 1	✓	✓	81.0	12	24	2	1.1016	26
2 x 1 1/4	✓	✓	81.0	8	16	2	1.2100	19
2 x 1 1/2	✓	✓	81.0	8	16	2	1.2475	20
2 1/2 x 1 1/2	✓	✓	93.7	4	8	2	1.8133	14
2 1/2 x 2	✓	✓	93.7	6	12	2	1.9850	24
3 x 2	✓	✓	103.1	4	8	2	2.8175	23
3 x 2 1/2	✓	✓	103.1	4	8	2	3.0080	24
4 x 3	✓	✓	112.0	2	4	2	4.0820	16

MASTER BOX



SIZE WxDxH 10 x 13 x 9 3/8"
PAPER A185/ 150 BC

Appendix E.

Metric System Table with English Equivalents

In.	mm.	In.	mm.
1/8	= 6	1 1/2	= 40
1/4	= 8	2	= 50
3/8	= 10	2 1/2	= 65
1/2	= 15	3	= 80
3/4	= 20	4	= 100
1	= 25	5	= 125
1 1/4	= 32	6	= 150


Appendix F.

Weight 1 kg. = 2.2 lbs.

INNER BOX


Carton Paper FLUTE

B2




SIZE WxDxH 6 1/4 x 9 5/8 x 8 1/2"
PAPER AS125/ AS125 C

B3




SIZE WxDxH 4 x 9 7/16 x 8 1/2"
PAPER AS125/ AS125 C

B4



SIZE WxDxH 4 5/8 x 6 1/8 x 8 1/2"
PAPER AS125/ AS125 C

B6




SIZE WxDxH 4 x 4 5/8 x 8 1/2"
PAPER AS125/ AS125 C

B8



SIZE WxDxH 4 5/8 x 6 1/8 x 4 1/8"
PAPER AS125/ AS125 C

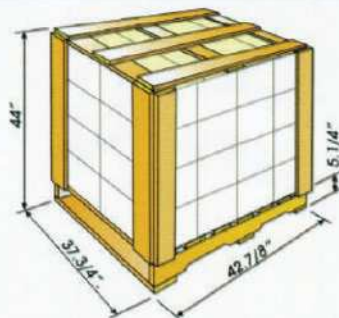
B12



SIZE WxDxH 4 x 4 5/8 x 4 1/8"
PAPER AS125/ AS125 C

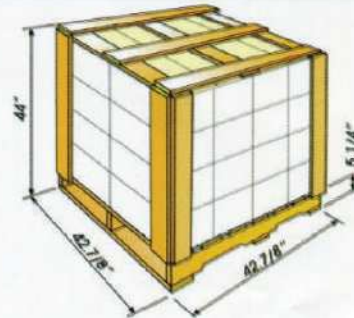
PALLET

Wood Pallet Standard ISPM-15



SA pallet Type A (44 Cartons)

Wooden Pallet Dimension 37.3/4" x 42.7/8" x 5.1/4"
Pallet Packing Dimension 37.3/4" x 42.7/8" x 44"



SA pallet Type B (48 Cartons)

Wooden Pallet Dimension 42.7/8" x 42.7/8" x 5.1/4"
Pallet Packing Dimension 42.7/8" x 42.7/8" x 44"



SIAM FITTINGS CO.,LTD.

100/1 Moo 2, Settakit 1 Road, Omnoi, Krathumban, Samutsakorn, Thailand, 74130
Tel. +66 (0) 2810 0832-5, Fax. +66 (0) 2429 1538, Email :contact@siamfittings.th.com
www.siamfittings.th.com